




M12 Female Field Wirable Assembly, Angled, Screw joint, T-coding

- Connector series: M12
- Gender: Female
- Coding: T
- Locking type: Fix screw
- Mounting type: Right angled
- Part No.: MB12FWTFHD**RA-X

** refers to pins number
X refers to cable gland size: 3=PG9, 7=PG11

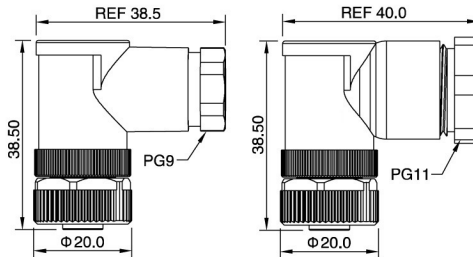

General information

Standard:	IEC 61076-2-111
Ambient temperature:	-25°C~ +90°C
Connector insert:	PA
Connector contacts:	Brass with gold plated
Connector nut/screw:	Zinc alloy with nickel plated
Connector body:	PA+GF
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
Suitable cable Dia:	PG9: 6-8mm / PG11: 8-10mm
IP rating:	IP68 in locked condition
Assembly instruction:	refer to page 284
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts	Contacts termination	Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.	
			A/C	D/C	AWG	mm ²			
02 pins		Screw joint	12A(40°C)	630V	630V	16AWG	1.5	PUR/PVC or customized	MB12FWTFHD02RA-3
03 pins		Screw joint	12A(40°C)	630V	630V	16AWG	1.5	PUR/PVC or customized	MB12FWTFHD03RA-3
04 pins		Screw joint	12A(40°C)	630V	630V	16AWG	1.5	PUR/PVC or customized	MB12FWTFHD04RA-7

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.