




M12 Female Panel Mount, PCB Type, Front fastened, Quick-lock Type

- Connector series: M12
- Gender: Female
- Locking type: Quick-lock
- Mounting type: Front fastened
- Part No.: MB12FBAFQ**ST

** refers to pins number

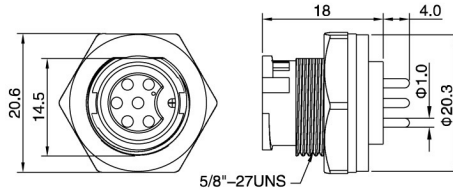

■ General information



Ambient temperature:	-25°C ~ +90°C
Connector insert:	PA + GF
Connector contacts:	Brass with gold plated
Connector nut/screw:	PA+GF
Seal / O-ring:	Epoxy resin / FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP65, IP68 in locked condition
Panel cut-out:	Refer to page 287
PCB layout:	Refer to page 286
Mating endurance:	>500 cycles

■ Electrical data & Mechanical data

Contacts	Contacts termination	Rated current	Voltage		Part No.
			A/C	D/C	
04 pins	PCB version	4A	250V	250V	MB12FBAFQ04ST
06 pins	PCB version	4A	60V	60V	MB12FBAFQ06ST

■ Remarks

- Please refer to Page 96 for products' part number encoding rule.