




M12 Female Molded Cable, Angled, S-coding, Shielded

- Connector series: M12
- Gender: Female
- Coding: S
- Locking type: Fix screw
- Mounting type: Right angled
- Part No.: MA12FSSF04RAXXXXXX
X refers to cable specification

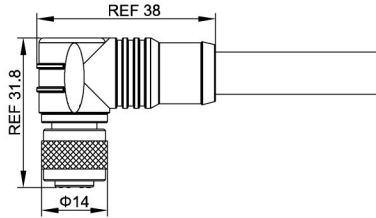

■ General information

Ambient temperature:	-40°C ~ +80°C (fixed installation) -20°C ~ +80°C (flexible installation)
Connector insert:	TPU; PA
Connector contacts:	Brass with gold plated
Connector overmold:	TPU
Connector nut/screw:	Brass with nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Available
IP rating:	IP68 in locked condition
Mating endurance:	>500 cycles

■ Electrical data & Mechanical data

Contacts	Rated current	Rated Voltage	Wire gauge / size		Cable jacket	Part No.
			AWG	mm ²		
04 pins (3+PE)	12A(40°C)	630V	16AWG	1.5	PUR / PVC	MA12FSSF04RAXXXB150

Note: X refers to cable specification

■ Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.